


## DS-2DY9250IAX-A 2MP 50X Laser Network Positioning System

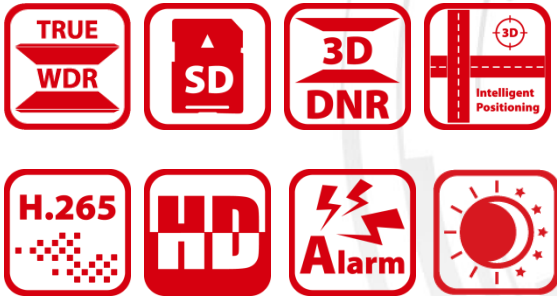

Hikvision DS-2DY9250IAX-A 2MP 50× Laser Network Positioning System adopts 1/2.8" progressive scan CMOS chip. With the 50× optical zoom lens, the camera offers more details over expansive areas.

This series of cameras can be widely used for wide ranges of high-definition, such as the rivers, forests, roads, railways, airports, ports, squares, parks, scenic spots, stations and large venues, etc.

### Key Features

- 1/2.8" progressive scan CMOS
- Up to 1920 × 1080 resolution
- Min. illumination:  
Color: 0.05 Lux @(F1.8, AGC ON)  
B/W: 0.01 Lux @(F1.8, AGC ON)  
0 Lux with IR
- 50× optical zoom, 16× digital zoom
- 120 dB WDR, 3D DNR, HLC, BLC
- 24 VAC
- Support up to 1000 m laser distance
- Support H.265+/H.265 video compression



## Specification


Camera Module		2MP 50× Laser Network Positioning System	
Image Sensor	1/2.8" progressive scan CMOS		
Min. Illumination	Color: 0.05 Lux @(F1.8, AGC ON) B/W: 0.01 Lux @(F1.8, AGC ON) 0 Lux with IR		
White Balance	Auto/Manual/ATW (Auto-tracing White Balance)/ Indoor/Outdoor/Fluorescent lamp/Sodium lamp		
AGC	Auto/Manual		
Shutter Time	1/1 s to 1/30,000 s		
Day & Night	IR Cut Filter		
Digital Zoom	16×		
Privacy Mask	24 programmable privacy masks		
Focus Mode	Auto/Semi-automatic/Manual		
WDR	120 dB WDR		
Lens			
Focal Length	6.6 mm to 330 mm, 50× Optical		
Zoom Speed	Approx. 4.5 s (optical lens, wide-tele)		
FOV	Horizontal field of view: 41.3° to 1.1° (wide-tele) Vertical field of view: 23.6° to 0.6° (wide-tele) Diagonal field of view: 47.4° to 1.3° (wide-tele)		
Working Distance	10 mm to 1500 mm (wide-tele)		
Aperture Range	F1.8 to F5.5		
PTZ			
Movement Range (Pan)	360° endless		
Pan Speed	Configurable, from 0.1°/s to 100°/s, Preset Speed: 100°/s		
Movement Range (Tilt)	From -90° to 40° (auto-flip)		
Tilt Speed	Configurable, from 0.1°/s to 50°/s, Preset Speed: 100°/s		
Proportional Zoom	Support		
Presets	300		
Patrol Scan	8 patrols, up to 32 presets for each patrol		
Pattern Scan	4 pattern scans, record time over 10 minutes for each scan		
Power-off Memory	Support		
Park Action	Preset/Pattern Scan/Patrol Scan/Auto Scan/Tilt Scan/Random Scan/Frame Scan/Panorama Scan		
PTZ Position Display	ON/OFF		
Preset Freezing	Support		
Scheduled Task	Preset/Pattern Scan/Patrol Scan/Auto Scan/Tilt Scan/Random Scan/Frame Scan/Panorama Scan/Dome Reboot/Dome Adjust/Aux Output		
Compression Standard			
Video Compression	Main Stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264/MJPEG Third Stream: H.265/H.264/MJPEG		
H.264 Type	Baseline Profile/Main Profile/High Profile		
H.264+	Support		
H.265 Type	Main Profile		
H.265+	Support		
Video Bitrate	32 kbps to 16384 kbps		
Audio Compression	G.711alaw/G.711ulaw/G.722.1/G.726/MP2L2/PCM		
Audio Bitrate	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-160Kbps(MP2L2)		

Smart Feature	
Smart Detection	Face Detection, Intrusion Detection, Line Crossing Detection, Audio Exception Detection, Region Entrance Detection, Region Exiting Detection
ROI encoding	Main stream, sub-stream and third stream respectively support eight fixed areas.
Smart Record	ANR (Automatic Network Replenishment), Dual-VCA
Laser	
Laser Distance	1000 m
Smart IR	Support
Image	
Max. Resolution	1920 × 1080
Main Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720) 50fps (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720) 60fps (1920 × 1080, 1280 × 960, 1280 × 720)
Sub-Stream	50Hz: 25fps (704 × 576, 640 × 480, 352 × 288) 60Hz: 30fps (704 × 480, 640 × 480, 352 × 240)
Third Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240)
Image Enhancement	HLC/BLC/3D DNR/Defog/EIS/Regional Exposure/Regional Focus
SVC	Support
Network	
Network Storage	Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB; NAS (NPS, SMB/ CIFS), ANR
Alarm Linkage	Alarm actions, such as Preset, Patrol Scan, Pattern Scan, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/Memory Card/NAS, Send Email, etc.
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, Bonjour
API	Open-ended, support ONVIF, PSIA and CGI, support HIKVISION SDK and Third-Party Management Platform
Simultaneous Live View	Up to 20 channels
User/Host	Up to 32 users. 3 levels: Administrator, Operator and User
Security Measures	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption; IEEE 802.1x port-based network access control; IP address filtering
Client	iVMS-4200, iVMS-5200
Web Browser	IE 8+, Firefox 30+, Safari 8.0+ web browser
Interface	
Audio	1-ch audio input/1-ch audio output
Network Interface	1 RJ45 10 M/100 M Ethernet Interface
Alarm	7-ch alarm input/2-ch alarm output
RS-485	Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive
BNC	1.0 V [p-p]/75 Ω, NTSC (or PAL) composite, BNC
Power	24 VAC (Max. 110 W)
Working Environment	Temperature: Outdoor: -40°C to 70°C (-40°F to 158°F) Humidity: ≤ 90%
Protection Level	IP66 Standard; TVS 6000V Lightning Protection, Surge Protection and Voltage Transient Protection
Material	Aluminum alloy ADC12
Dimensions	Φ360 mm × 508 mm (Φ 14.17" × 20.00")
Weight	Approx. 13 kg (28.66 lb)

## Order Model


DS-2DY9250IAX-A 24 VAC

## Dimensions

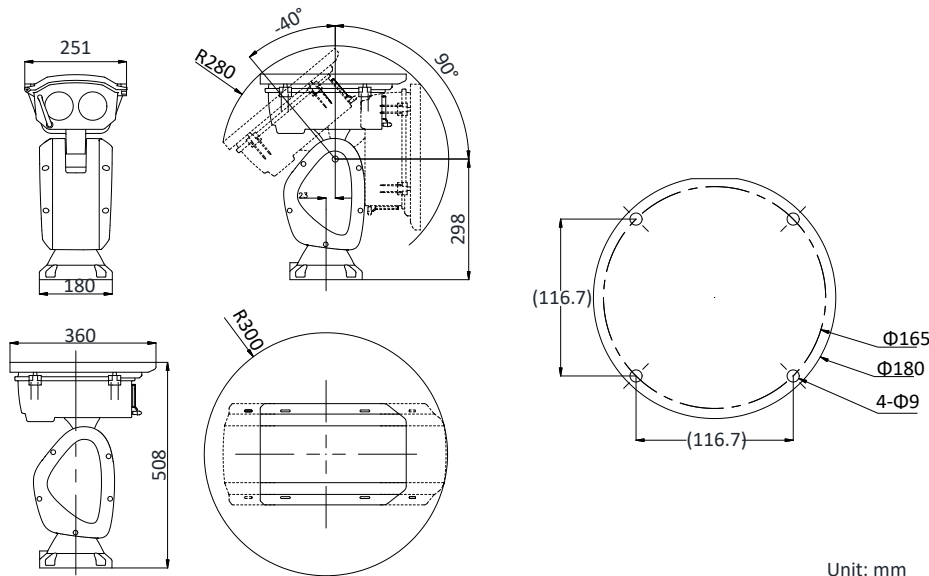

Unit: mm

## Accessories



DS-1693ZJ

Wall Mount

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com